


◆ 1.27mm Pitch Straight Plug Connector (40 Pins)

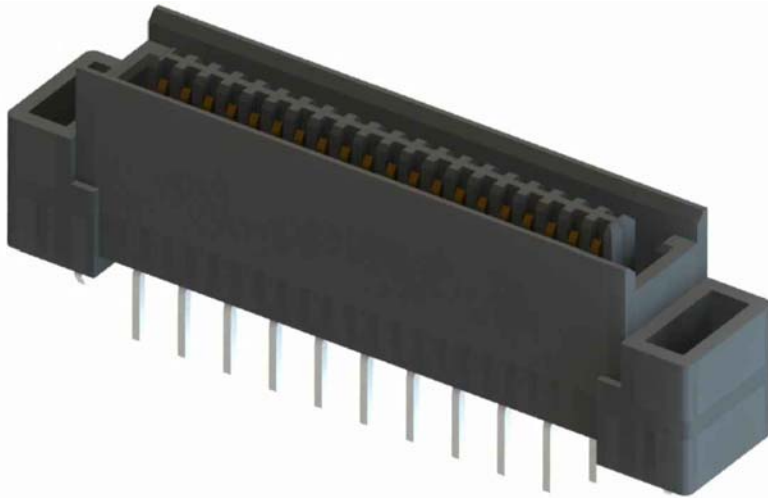

Ordering Information:

67230 - A4 - 040**

Physical:

- ◆ Housing
Thermoplastic, UL 94V-0 Rated, Black Color
- ◆ Terminal
Copper Alloy
- ◆ Board Lock
Copper Alloy
- ◆ Terminal Plating
Gold Plating on Contact Area
Tin Plating on Solder Tails
Nickel Underplating Overall
- ◆ Board Lock
Nickel Plating Overall

Mechanical Specifications:

- ◆ Durability
50 Cycles
- ◆ Operating Temperature Rating
-40°C to +80°C

Electrical Specifications:

- ◆ Rated Voltage
50V AC Max. (Per Pin)
- ◆ Rated Current
0.5A
- ◆ Contact Resistance
55 Milliohms Initial
- ◆ Dielectric Withstanding Voltage
300V AC for 1 Minute
- ◆ Insulation Resistance
100 Megohms

