


◆ Dual Row 1.27mm Pitch Edge Card Connector(120/184 Pins)

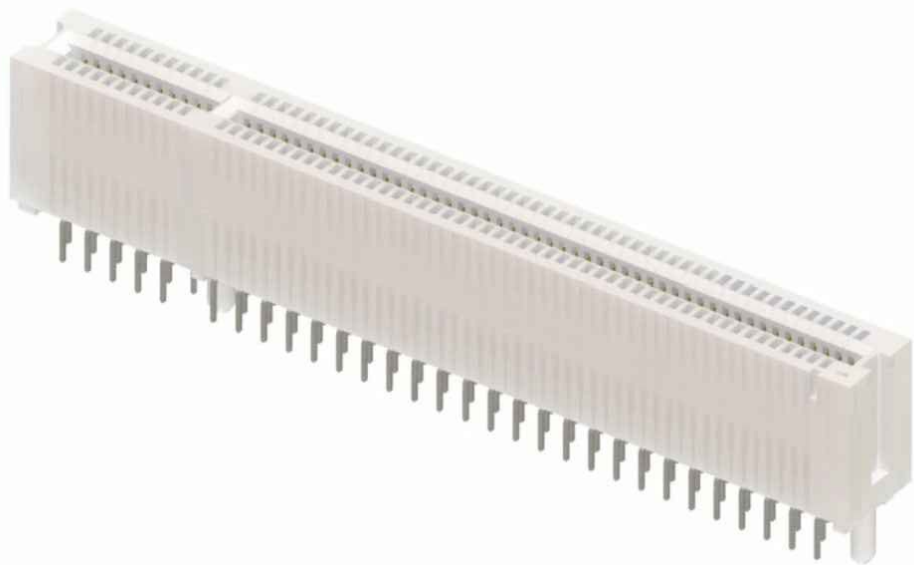

Ordering Information:

67312 - A4 - *** **

1

1.Number of Contact Per Port
120, 184 ckt

Physical:



- ◆ Housing
 - High Temp., UL 94V-0 Rated
- ◆ Terminal
 - Copper Alloy
- ◆ Board Lock
 - Stainless Steel
- ◆ Terminal Plating
 - Gold Plating on Contact Area
 - Tin Plating on Solder Tails
 - Nickel Underplating Overall

Mechanical Specifications:

- ◆ Durability
50 Cycles
- ◆ Operating Temperature Rating
-40°C to +80°C

Electrical Specifications:

- ◆ Rated Voltage
50V AC Max. (Per Pin)
- ◆ Rated Current
0.5A Max.
- ◆ Contact Resistance
55 Milliohms Max. Initial
- ◆ Dielectric Withstanding Voltage
300V AC Min. for 1 Minute
- ◆ Insulation Resistance
100 Megohms Min.

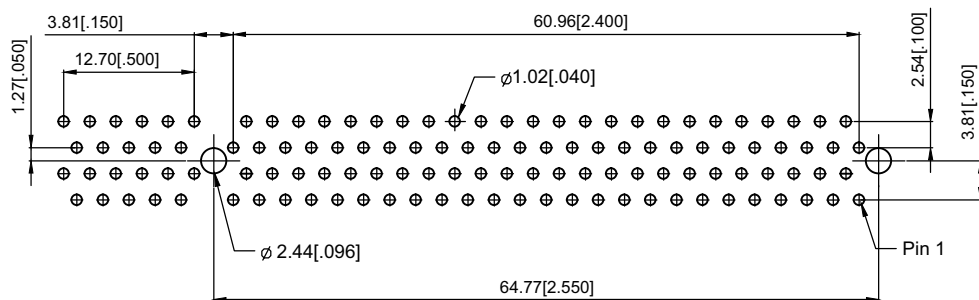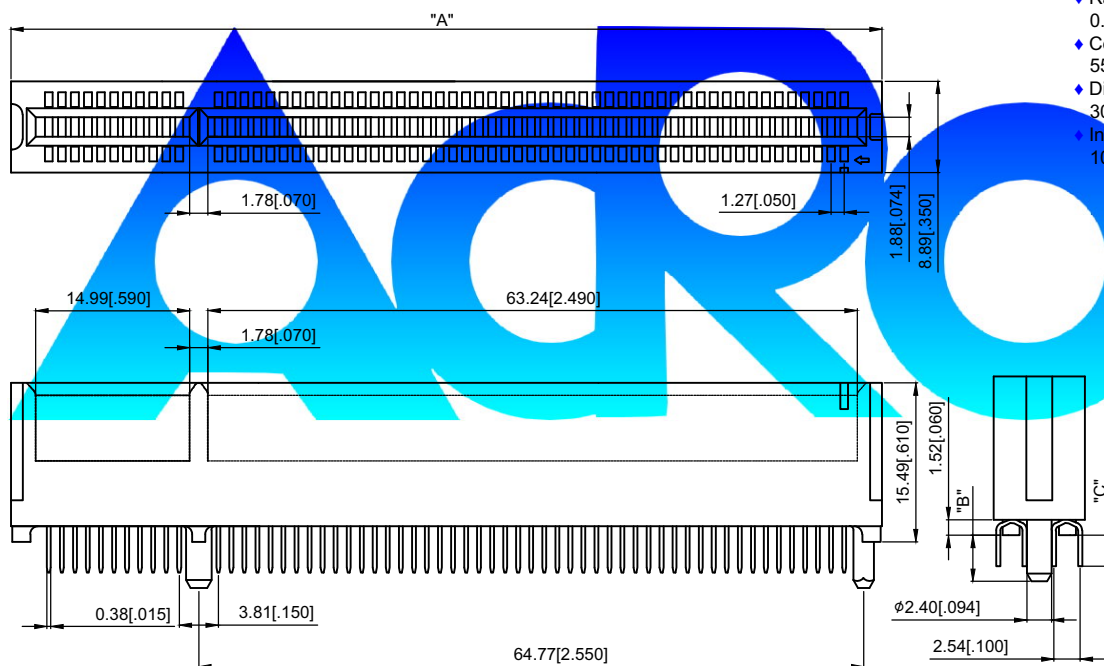

Recommended PCB Layout (Top View)

No. of Pos	"A"	"B"	"C"
120ckt	84.84 [3.340]	4.48 [.176]	3.00 [.118]
184ckt	128.02 [5.040]	4.48 [.176]	2.54 [.100]
		2.20 [.087]	2.20 [.087]