
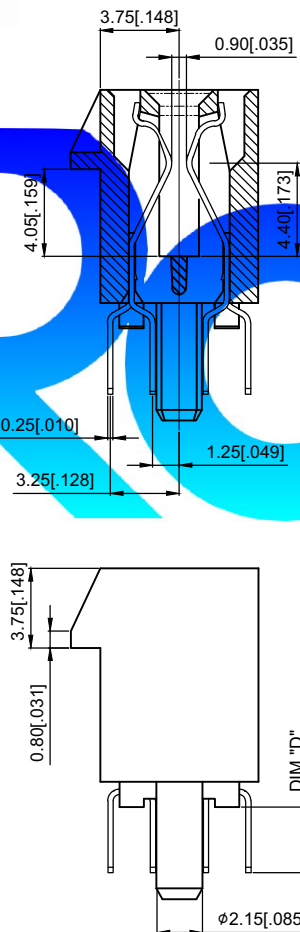
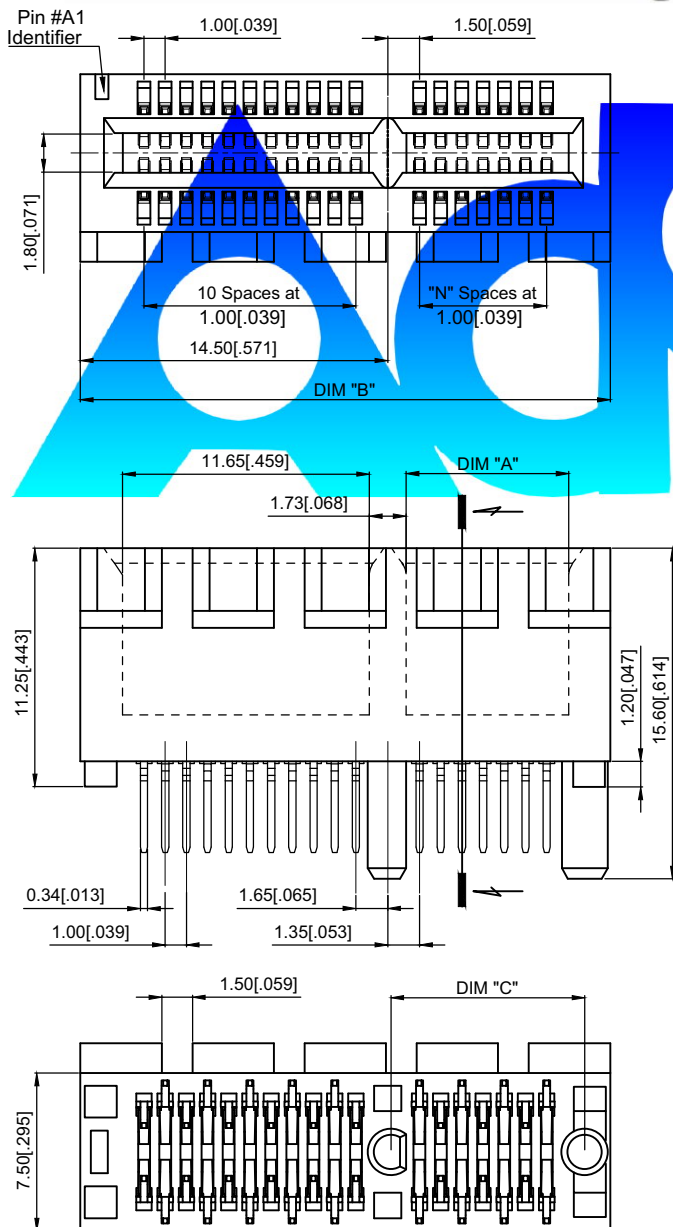


◆ PCI Express 2.0 Edge Card Dip Type Connector (36, 64, 98, 164 Pins)

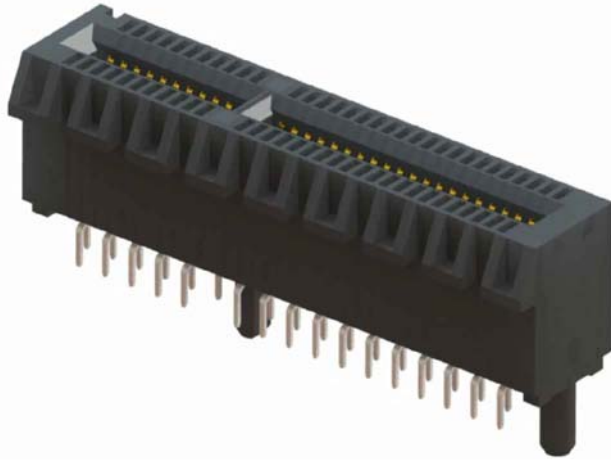

Ordering Information:

67340 - A4 - * ****

1

1.Number of Contact Per Port
036, 064, 098, 164 ckt

Physical:

- ◆ Housing
High Temp, Nylon, UL 94V-0 Rated, Black Color
- ◆ Terminal
Copper Alloy
- ◆ Terminal Plating
Gold Plating on Contact Area
Tin Plating on Solder Tails
Nickel Underplating Overall

Mechanical Specifications:


- ◆ Durability
50 Cycles
- ◆ Operating Temperature Rating
-40°C to +80°C

Electrical Specifications:

- ◆ Rated Voltage
50V AC Max. (Per Pin)
- ◆ Rated Current
0.5A Max.
- ◆ Contact Resistance
55 Milliohms Max. Initial
- ◆ Dielectric Withstanding Voltage
300V AC Min. for 1 Minute
- ◆ Insulation Resistance
100 Megohms Min.

Connector Link Width	# Pos	N	DIM "A"	DIM "B"	DIM "C"	PCB THK	DIM "D"
X1	36	6	7.65 [.278]	25.00 [.984]	9.15 [.360]	1.58 [.062]	2.30 [.091]
X4	64	20	21.65 [.852]	39.00 [1.535]	23.15 [.911]	2.36 [.093]	3.10 [.122]
X8	98	37	38.65 [1.522]	56.00 [2.205]	40.15 [1.581]	2.26 [.089]	4.00 [.157]
X16	164	70	71.65 [2.821]	89.00 [3.504]	73.15 [2.880]		

◆ PCI Express 2.0 Edge Card Dip Type Connector (36, 64, 98, 164 Pins)

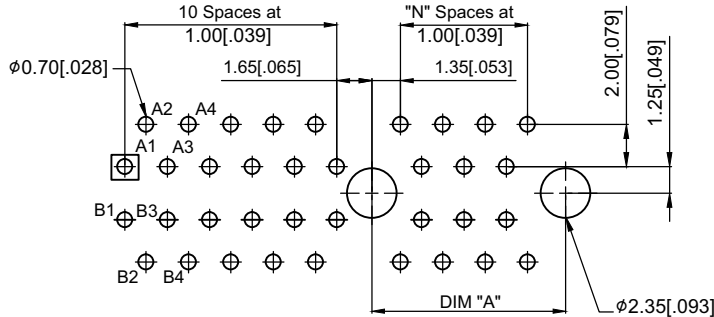

Recommended PCB Layout
(Top View)

Connector Link Width	# Pos	N	DIM "A"	DIM "B"	"C"
X1	36	6	9.15 [.360]	8.15 [.321]	B17
X4	64	20	23.15 [.911]	22.15 [.872]	B17,B31
X8	98	37	40.15 [1.581]	39.15 [1.541]	B17,B31 B48
X16	164	70	73.15 [2.880]	72.15 [2.841]	B17,B31 B48,B81

