
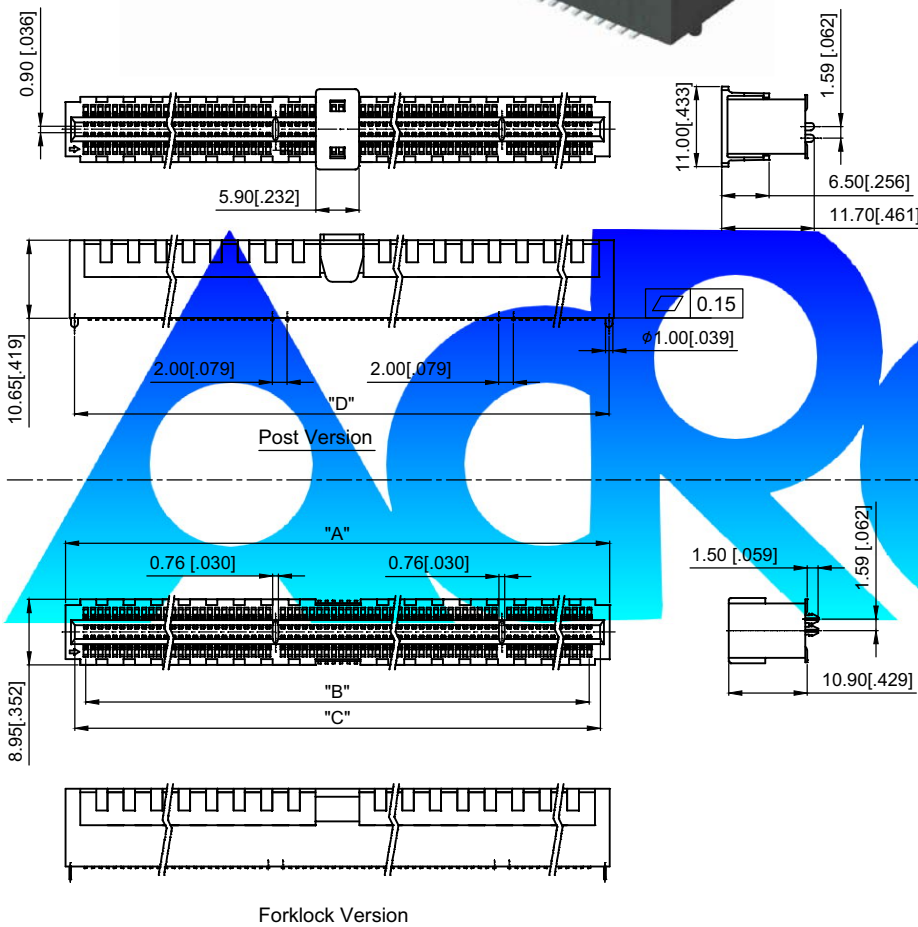


◆ 1.00mm Pitch Edge Card SMT Type Connector (48, 78, 116, 136 Pins)

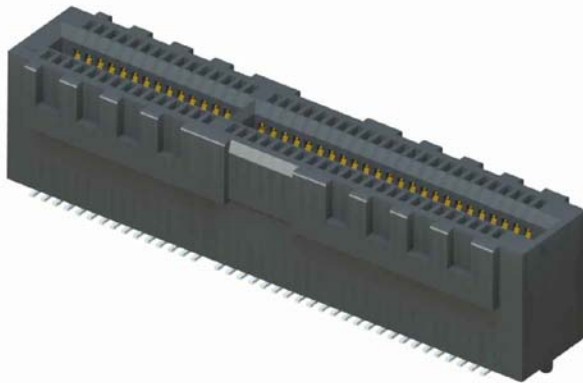

Ordering Information:

67404 - A4 - * 0 ***
1

1. Number of Contact Per Port
048, 078, 116, 136 ckt

Physical:

- ◆ Housing
Nylon 9T, UL 94V-0 Rated, Black Color
- ◆ Terminal
Copper Alloy
- ◆ Terminal Plating
Gold Plating on Contact Area
Tin Plating on Solder Tails
Nickel Underplating Overall


Mechanical Specifications:

- ◆ Durability
50 Cycles
- ◆ Operating Temperature Rating
-40°C to +80°C

Electrical Specifications:

- ◆ Rated Voltage
50V AC Max. (Per Pin)
- ◆ Rated Current
0.5A Max.
- ◆ Contact Resistance
55 Milliohms Max. Initial
- ◆ Dielectric Withstanding Voltage
300V AC Min. for 1 Minute
- ◆ Insulation Resistance
100 Megohms Min.

No. of Pos	"A"	"B"	"C"	"D"
48ckt	29.54 [1.163]	24.00 [0.945]	27.00 [1.063]	28.25 [1.112]
78ckt	44.54 [1.754]	39.00 [1.535]	42.00 [1.654]	43.25 [1.703]
116ckt	64.54 [2.541]	59.00 [2.323]	62.00 [2.441]	63.25 [2.490]
136ckt	74.54 [2.935]	69.00 [2.717]	72.00 [2.835]	73.25 [2.884]

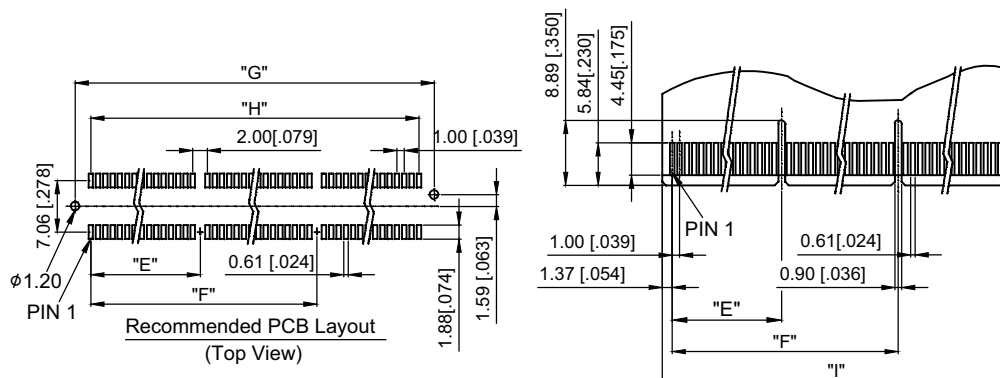

No. of Pos	"E"	"F"	"G"	"H"	"I"
48ckt	9.00 [0.354]		28.25 [1.112]	24.00 [0.945]	26.75 [1.053]
78ckt	15.00 [0.591]		43.25 [1.703]	39.00 [1.535]	41.75 [1.644]
116ckt	15.00 [0.591]	31.00 [1.220]	63.245 [2.490]	59.00 [2.323]	61.75 [2.411]
136ckt	26.00 [1.024]	57.00 [2.244]	73.245 [2.884]	69.00 [2.717]	71.75 [2.825]