


—

Postion	"K"	"L"	"M"	"N"	"G"	"H"	"J"
80ckt	34.40 [1.354]	18.80 [.740]	16.80 [.661]	36.40 [1.433]	37.40 [1.472]	34.40 [1.354]	16.80 [.661]
120ckt	50.40 [1.984]	26.80 [1.055]	24.80 [.976]	52.40 [2.063]	53.40 [2.102]	50.40 [1.984]	24.80 [.976]
140ckt	58.40 [2.299]	30.80 [1.213]	28.80 [1.134]	60.40 [2.378]	61.40 [2.417]	58.40 [2.299]	28.80 [1.134]
200ckt	82.40 [3.244]	42.80 [1.685]	40.80 [1.606]	84.40 [3.323]	85.40 [3.362]	82.40 [3.244]	40.80 [1.606]



◆ 0.8mm Pitch Edge Card SMT Type Connector (40, 60, 70 Pins)



Ordering Information:

67405 - A4 - $\frac{*}{1}$ 0 ***

1. Number of Contact Per Port
040, 060, 070 ckt

Physical:


Housing
LCP, UL 94V-0 Rated, Black Color
Terminal
Copper Alloy
Terminal Plating
Gold Plating on Contact Area
Tin Plating on Solder Tails
Nickel Underplating Overall

Mechanical Specifications:

Durability
50 Cycles
Operating Temperature Rating
-40°C to +80°C

Electrical Specifications:

Rated Voltage
50V AC Max. (Per Pin)
Rated Current
0.5A Max.
Contact Resistance
55 Milliohms Max. Initial
Dielectric Withstanding Voltage
300V AC Min. for 1 Minute
Insulation Resistance
100 Megohms Min.

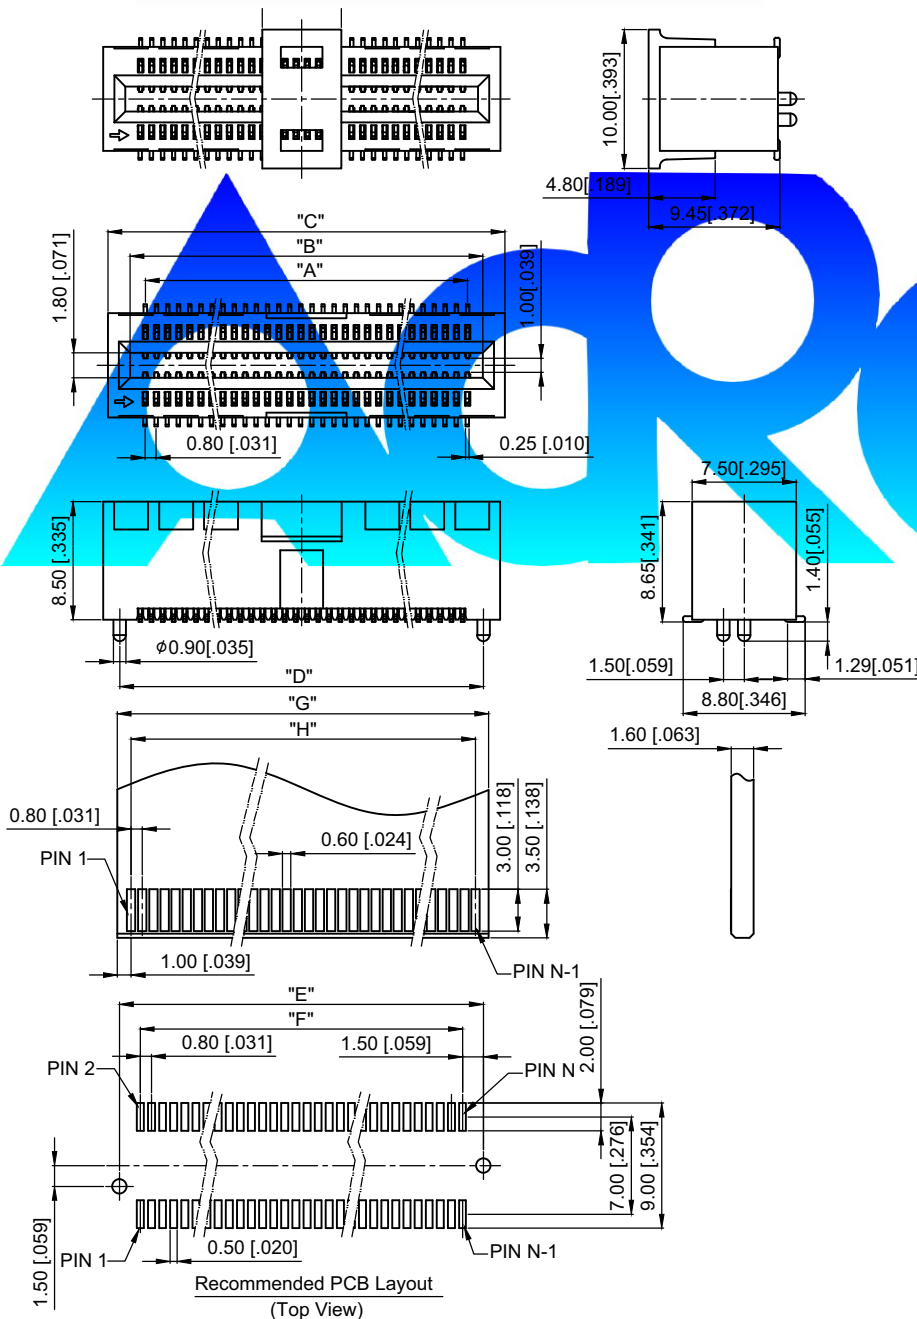

No. of Pos	"A"	"B"	"C"	"D"
40ckt	15.20 [.598]	17.35 [.683]	20.60 [.881]	18.20 [.717]
60ckt	23.20 [.913]	25.35 [.998]	28.60 [1.126]	26.20 [1.031]
70ckt	27.20 [1.071]	29.35 [1.156]	32.60 [1.283]	30.20 [1.189]

Position	"F"	"E"	"H"	"G"
40ckt	15.20 [.598]	18.20 [.717]	15.20 [.598]	17.20 [.677]
60ckt	23.20 [.913]	26.20 [1.031]	23.20 [.913]	25.20 [.992]
70ckt	27.20 [1.071]	30.20 [1.189]	27.20 [1.071]	29.20 [1.150]