


◆ PCI Express SMT Type Connector(36, 64, 98, 164 Pins)

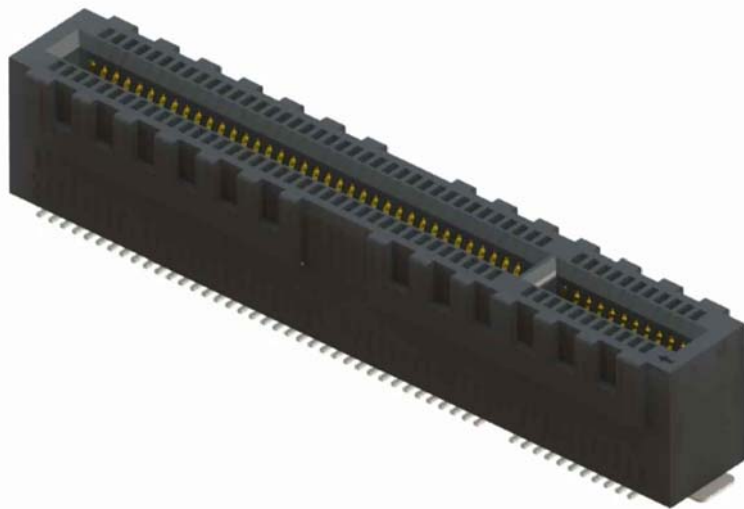

Ordering Information:

67407 - A4 - * ****

1

1.Number of Contact per Port
036, 064, 098, 164 ckt

Physical:


- ◆ Housing
High Temp, Nylon, UL 94V-0 Rated,
Black Color
- ◆ Terminal
Copper Alloy
- ◆ Terminal Plating
Gold Plating on Contact Area
Tin Plating on Solder Tails
Nickel Underplating Overall

Mechanical Specifications:

- ◆ Durability
50 Cycles
- ◆ Operating Temperature Rating
-40°C to +80°C

Electrical Specifications:

- ◆ Rated Voltage
50V AC Max. (Per Pin)
- ◆ Rated Current
0.5A Max.
- ◆ Contact Resistance
55 Milliohms Max. Initial
- ◆ Dielectric Withstanding Voltage
300V AC Min. for 1 Minute
- ◆ Insulation Resistance
100 Megohms Min.

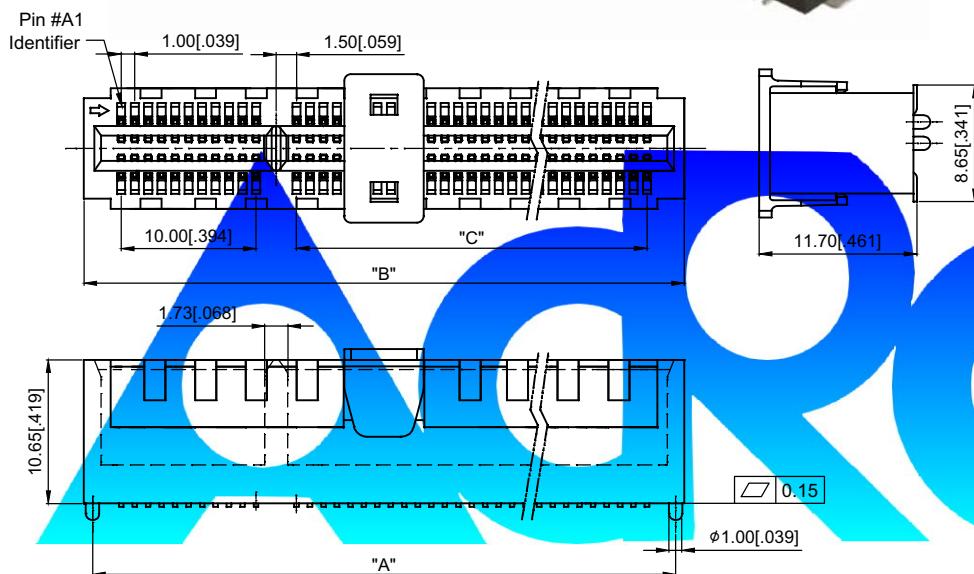

No. of Pos	"A"	"B"	"C"	"D"
36ckt	23.24 [.915]	24.54 [.966]	6.00 [.236]	19.00 [.748]
64ckt	37.24 [1.466]	38.54 [1.517]	20.00 [.787]	33.00 [1.299]
98ckt	54.24 [2.135]	55.54 [2.187]	37.00 [1.457]	50.00 [1.969]
164ckt	87.24 [3.435]	88.54 [3.486]	70.00 [2.756]	83.00 [3.268]

