


◆ 1.00 Pitch DDR3 240 Pos. Vertical, Dip Type

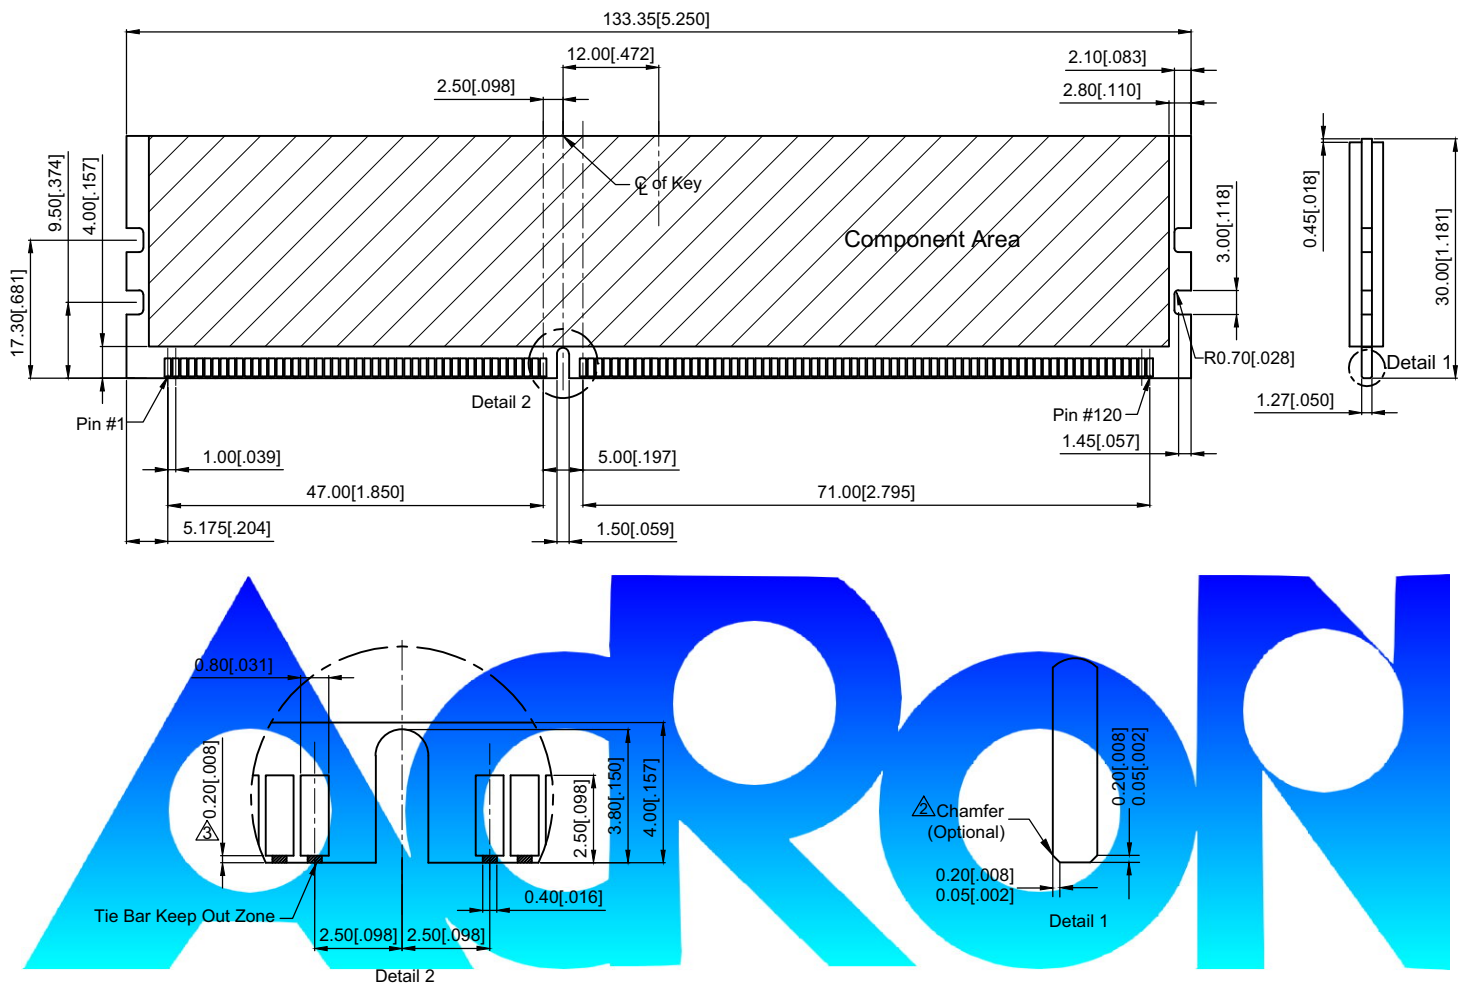

Notes:

1. Recommended Plating For Contact PADS:
Preferred: 0.76 Micrometers Gold Plating Min.
over 2.00 Micromter Nickel
Alternative: 0.05-0.07 Micrometers Gold Plating
over 2.00 Micromrter Nickel Must Use
an Electronic Contact Grade Corrosive
Barrier Lubricant

2 Chamfer is Optional and is Not to Hit Gold PADS
3 Leading be Free of Burrs and External Tie Bars