

◆ 1.00 Pitch Slimbody DDR3 240 Pos. Vertical, SMT Type



Mechanical Specifications:

- ◆ Durability
25 Cycles
- ◆ Operating Temperature Rating
-10°C to +85°C

Electrical Specifications:


- ◆ Rated Voltage
30V AC (Per Pin)
- ◆ Rated Current
1.0A
- ◆ Contact Resistance
30 mohms Initial
- ◆ Dielectric Withstanding Voltage
500V AC for 1 Minute
- ◆ Insulation Resistance
1000 Megohms

Ordering Information:


68609 - A4 - 240**

Physical:

- ◆ Housing & Latch
High Temp. Plastic, Glass UL94V-0 Rated
- ◆ Terminal
Copper Alloy
- ◆ Forklock
Copper Alloy
- ◆ Terminal Plating
Gold Plating on Contact Area
Tin Plating on Solder Tails
Nickel Underplating Overall
- ◆ Forklock
Tin Plating on Solder Tails
Nickel Underplating Overall

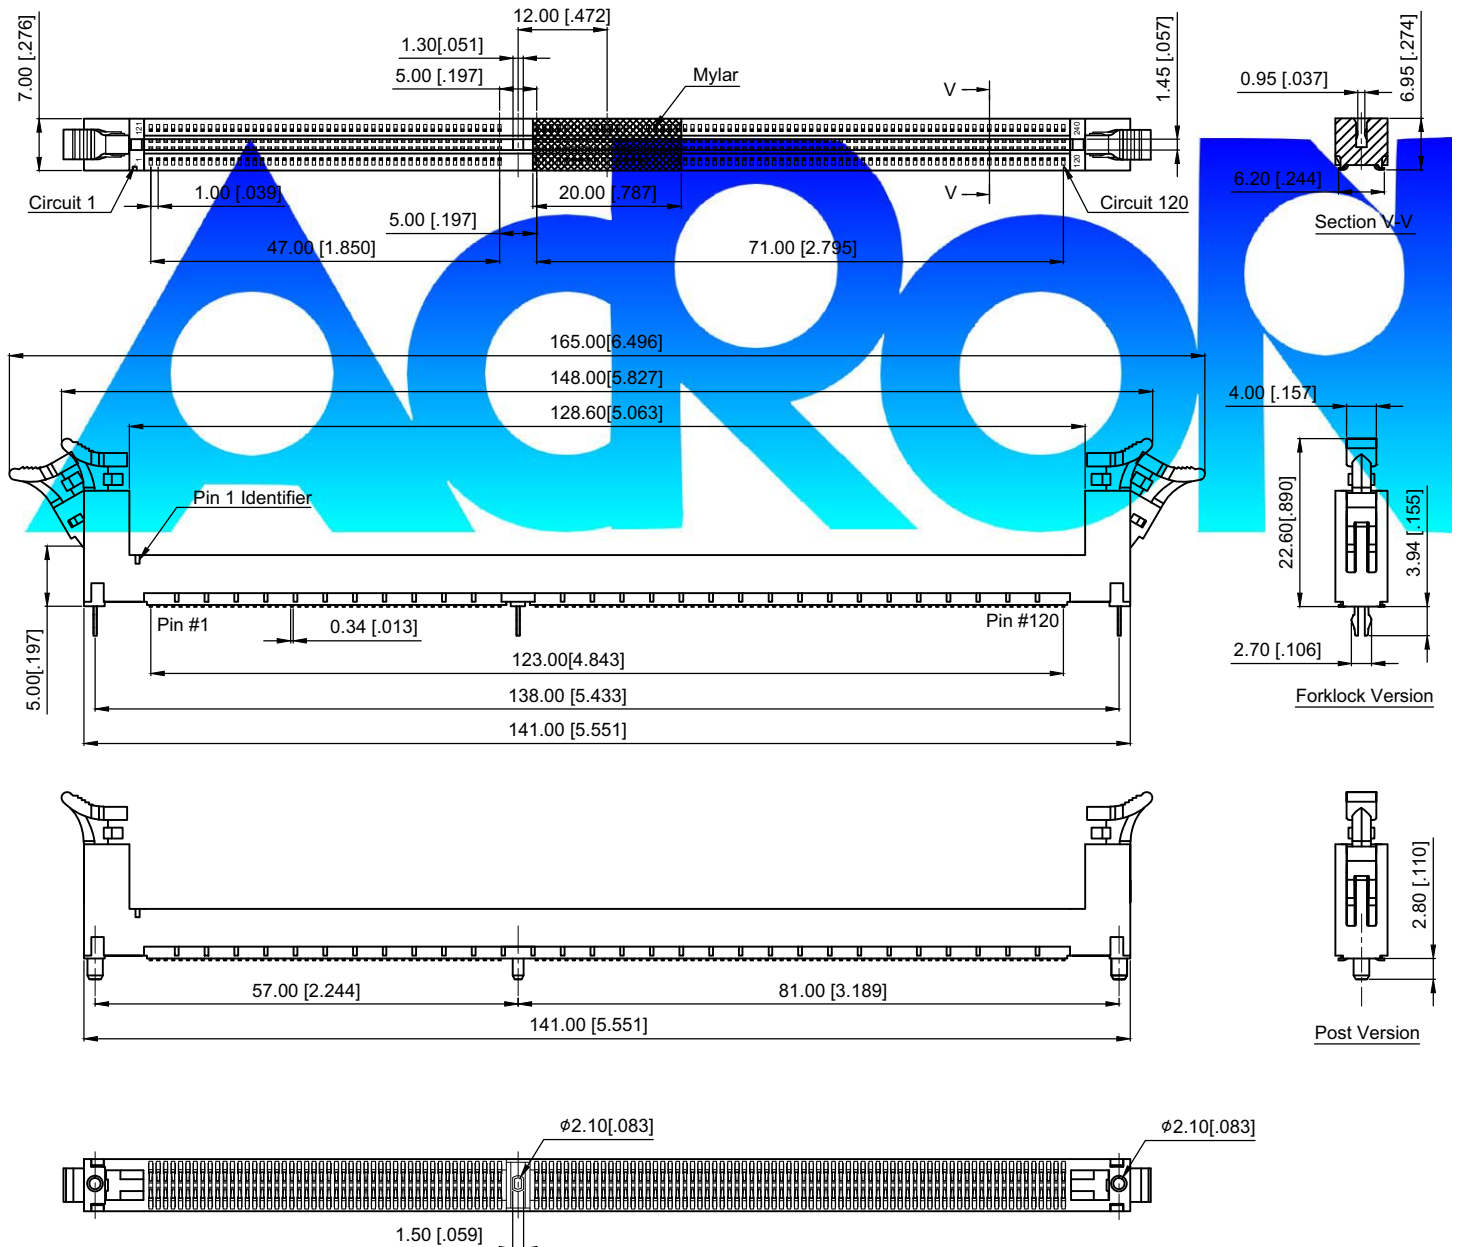

◆ 1.00 Pitch Slimbody DDR3 240 Pos. Vertical, SMT Type

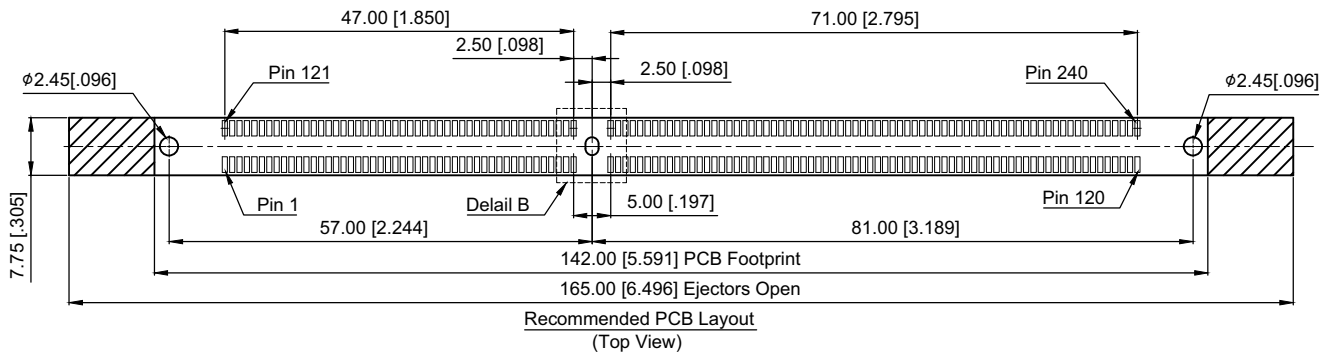

Notes:

1. Recommended Plating for Contact Pads:
Preferred: 0.76 Micrometers Gold Plating over 2.00 Micrometer Nickel
Alternative: 0.05~0.75 Micrometers Gold Plating over 2.00 Micrometers Nickel Must Use an Electronic Contact Grade Corrosive Barrier Lubricant

