


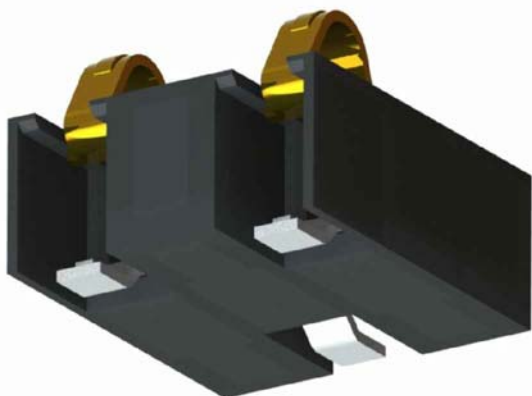

LTBTMXR - 030 - B $\frac{Q}{1}$

- ◆ Housing
Thermoplastic, UL 94V-0 Rated, Black Color
- ◆ Terminal
Copper Alloy
- ◆ Terminal Plating
Gold Plating on Contact Area
Tin Plating on Solder Tails
Nickel Underplating Overall

- ◆ Normal Force
100g
- ◆ Durability
10000 Cycles
- ◆ Operating Temperature Rating
-35°C to +85°C

- Rated Voltage
4.5V RMS AC
- Rated Current
1.0A Max.
- Contact Resistance
25 Milliohms Max. Initial
- Dielectric Withstanding Voltage
500V AC Min for 1 Minute
- Insulation Resistance
100 Megohms Min.

