


◆ 5 Pin Battery Connector 2.5mm Pitch

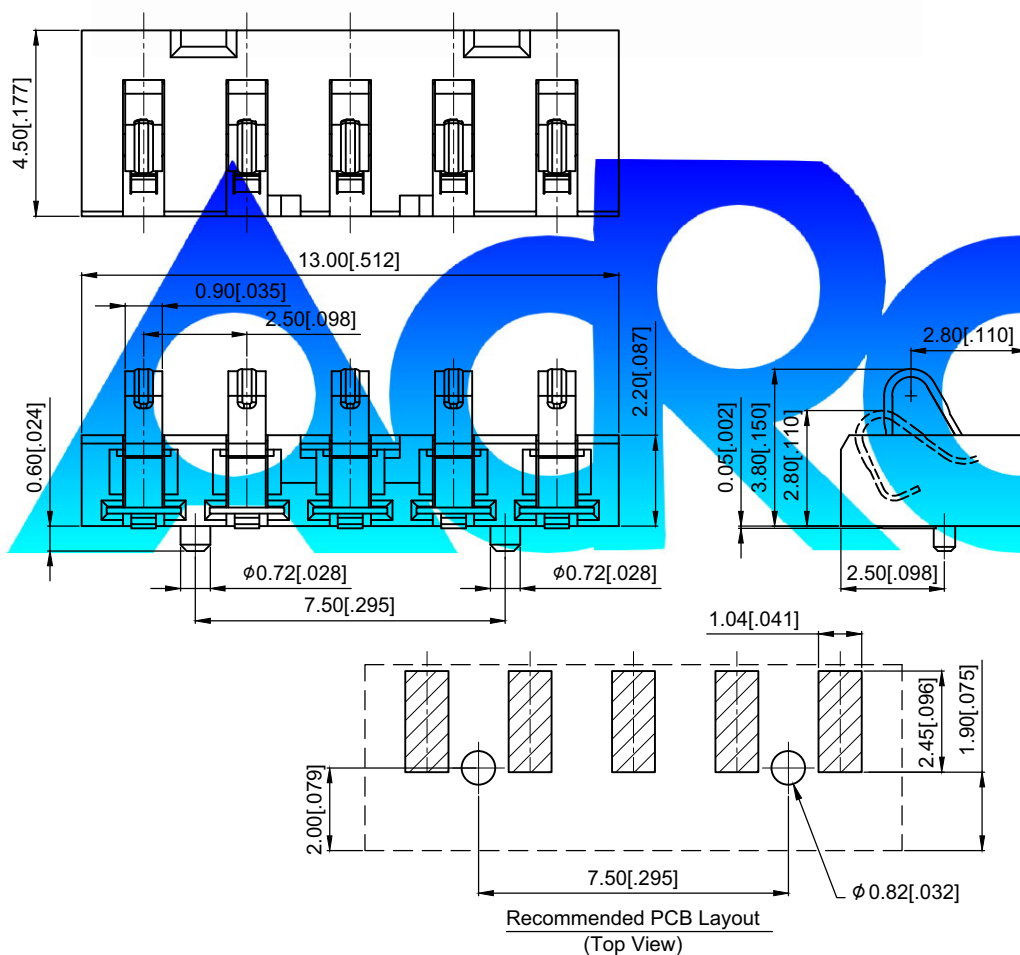

Ordering Information:

BTM34 - A3 - 0 5 0 $\frac{4}{1}$

1. Plating Options
4-10u" Gold In Contact Area

Physical:


- ◆ Housing
LCP, UL94V-0, Black Color
- ◆ Cap
LCP, UL94V-0, Black Color
- ◆ Terminal
Copper Alloy
- ◆ Terminal Plating
Gold Plating on Contact Area
Gold Flash on Plated Gold Area
Nickel Underplating Overall

Mechanical Specifications:

- ◆ Normal Force
70g Min.
- ◆ Durability
10000 Cycles
- ◆ Operating Temperature Rating
-55°C to +85°C

Electrical Specifications:

- ◆ Rated Voltage
7.0 Volt DC(per pin)Max.
- ◆ Rated Current
2.5A Max.
- ◆ Contact Resistance
20 Milliohms Max. Initial
- ◆ Dielectric Withstanding Voltage
500V AC Min for 1 Minute
- ◆ Insulation Resistance
1000 Megohms Min.

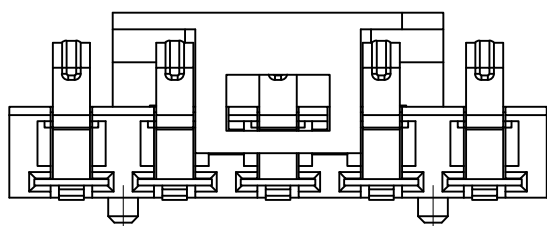

With Cap

