

◆ M12 A-Coding 2A 8P Field Installable Cable End Female Solder

Ordering Information:

CIR03 - A4 - 8E2 * 000
1




- 1.Plating Options
0:Gold Flash in Contact Area
2:15u" Gold in Contact Area
3:30u" Gold in Contact Area
4:6u" Gold in Contact Area

Physical:

- ◆ Housing
Thermoplastic, Black Color
- ◆ Terminal
Copper Alloy
- ◆ Glue
Epoxy, Black Color
- ◆ Gasket
EPDM, Black Color
- ◆ Cover
Thermoplastic, Black Color
- ◆ Gland
NBR, Black Color
- ◆ Gland Nut
Thermoplastic, Black Color
- ◆ O-Ring
Silicone, Red Color
- ◆ Screw Nut
Copper Alloy
- ◆ Terminal Plating
Gold Plating
- ◆ Screw Nut Plating
Nickel Plating

Specifications:

- ◆ Waterproof Rate
IP68(Mating)
- ◆ Cable Diameter
5.0mm to 6.5mm
- ◆ Recommend Cover Torque
2.5~3.0 kgf-cm
- ◆ Recommend Gland Nut Torque
6.5~7.0 kgf-cm

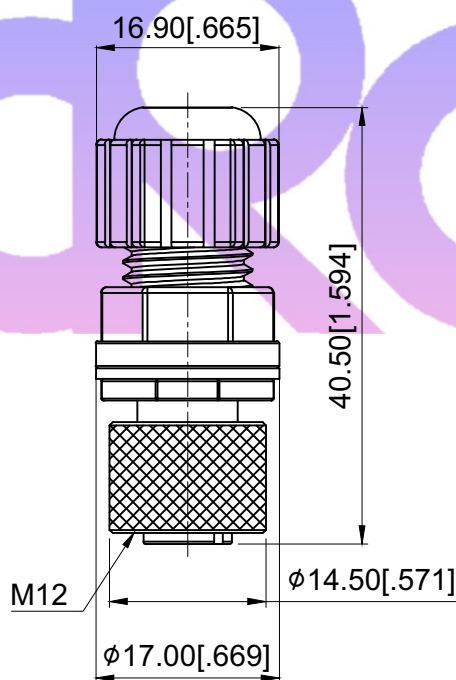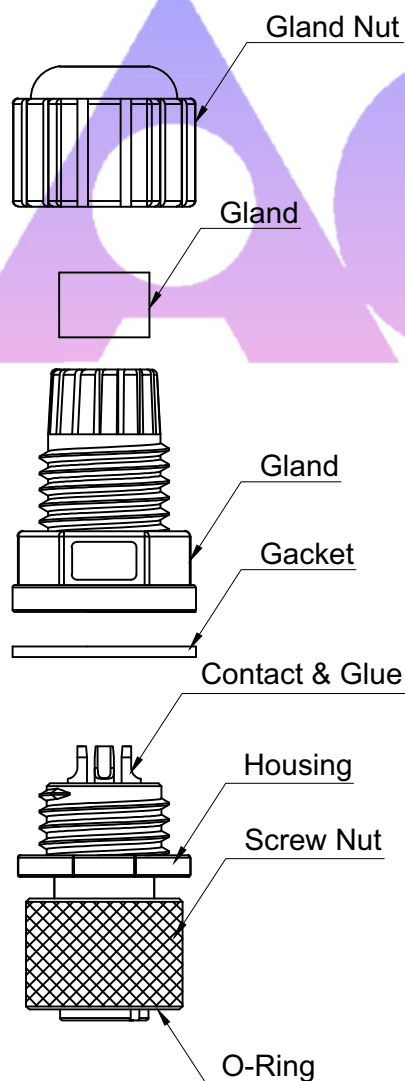

Pin
Assignment