

◆ **M12 A-Coding Panel Front Mount 4A 4&5P Male Solder**






Ordering Information:
CIR03 - A4 - * A3 * 000
1 2

- 1.Arangement of Contacts
4,5
- 2.Plating Options
0:Gold Flash in Contact Area
2:15u" Gold in Contact Area
3:30u" Gold in Contact Area
4:6u" Gold in Contact Area

Physical:

- ◆ Housing
Thermoplastic, Black Color
- ◆ Terminal
Copper Alloy
- ◆ Glue
Epoxy, Black Color
- ◆ Shield Case
Copper Alloy
- ◆ Base
Thermoplastic, Black Color
- ◆ Hex Nut
Copper Alloy
- ◆ O-Ring
NBR, Black Color
- ◆ Terminal Plating
Gold Plating
- ◆ Hex Plating
Nickel Plating
- ◆ Shield Case
Nickel Plating

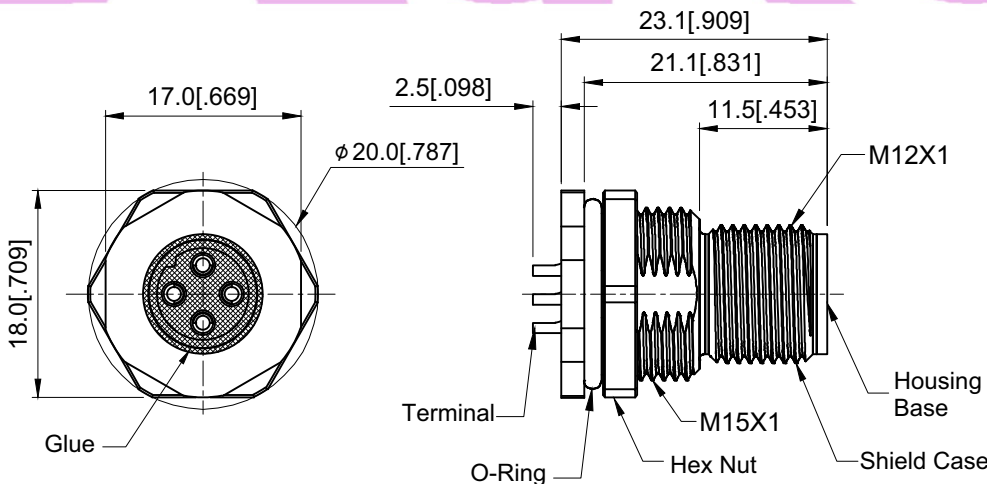

Specifications:

- ◆ Waterproof Rate
IP68
- ◆ Recommend Panel Thickness
0.8mm to 5.0mm
- ◆ Recommend Torque
9~10 kgf-cm
- ◆ Durability
100 Cycles Min.
- ◆ DWV
1400 Vrms for 4P
1000 Vrms for 5P
- ◆ Rated Voltage
250V AC/DC for 4P
60V AC/DC for 5P
- ◆ Insulation Resistance
100 MΩ Min.

Pin Assignment		
Model No.	CIR03-A4-4A3*000	CIR03-A4-5A3*000