

◆ M12 A-Coding 4A 4&5P Field Installable Cable End Female Solder



Ordering Information: CIR03 - A4 - * E2 * 000 1 2



- 1.Pin Assignment
4,5
- 2.Plating Options
0:Gold Flash in Contact Area
2:15u" Gold in Contact Area
3:30u" Gold in Contact Area
4:6u" Gold in Contact Area

Physical:

- ◆ Housing
Thermoplastic, Black Color
- ◆ Terminal
Copper Alloy
- ◆ Glue
Epoxy, Black Color
- ◆ Gasket
EPDM, Black Color
- ◆ Cover
Thermoplastic, Black Color
- ◆ Gland
NBR, Black Color
- ◆ Gland Nut
Thermoplastic, Black Color
- ◆ O-Ring
Silicone, Red Color
- ◆ Screw Nut
Copper Alloy
- ◆ Terminal Plating
Gold Plating
- ◆ Screw Nut Plating
Nickel Plating

Specifications:

- ◆ Waterproof Rate
IP68(Mating)
- ◆ Cable Diameter
4.0mm to 6.5mm for 4P
4.0mm to 7.0mm for 5P
- ◆ Recommend Cover Torque
6~7 kgf-cm for 4P
1.5~2.0 kgf-cm for 5P
- ◆ Recommend Gland Nut Torque
9~10 kgf-cm for 4P
2.5~3.0 kgf-cm for 5P

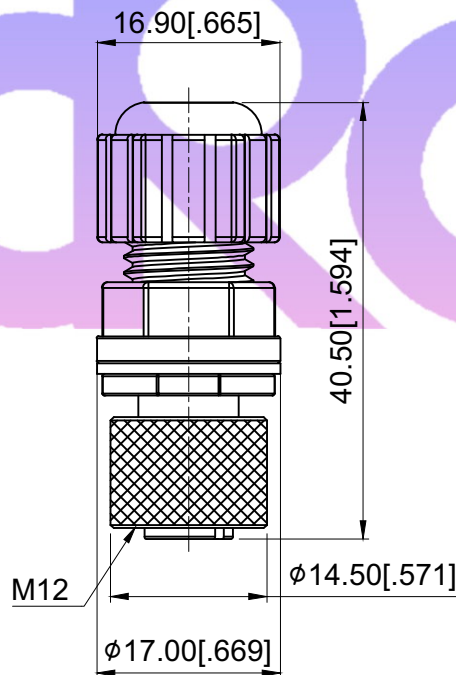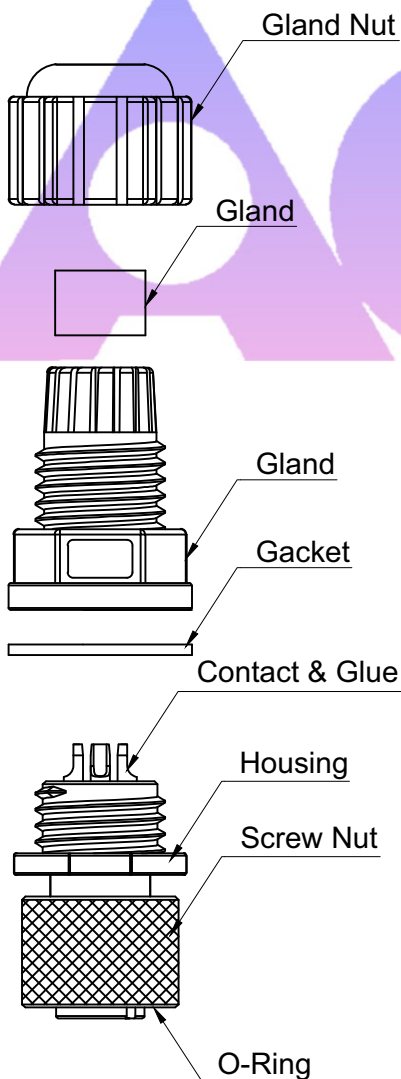

Pin Assignment		
Model No.	CIR03-A4-4E2*000	CIR03-A4-5E2*000