
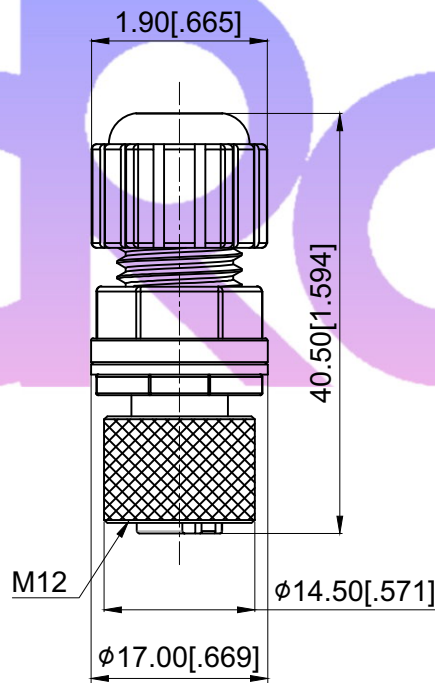


◆ **M12 D-Coding 4A 4P Field Installable Cable End  
Female Solder**

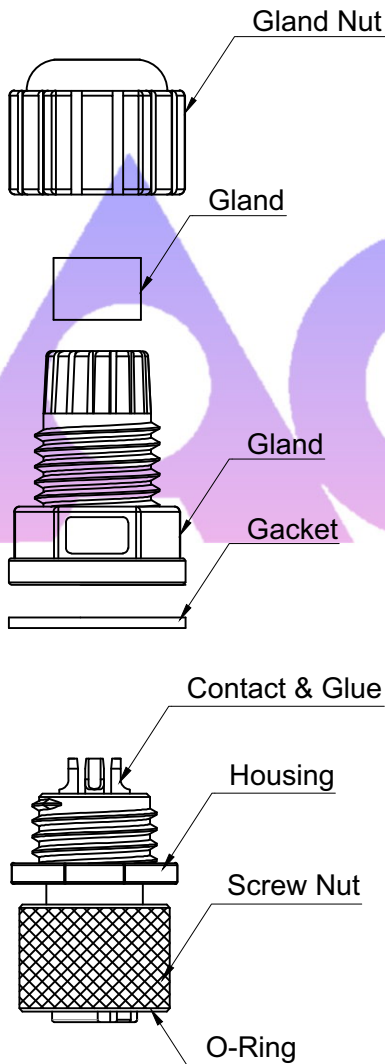

**Ordering Information:**

**CIR05 - A4 - 4E2 \* 000**  
**1**


- 1.Plating Options  
0:Gold Flash in Contact Area  
2:15u" Gold in Contact Area  
3:30u" Gold in Contact Area  
4:6u" Gold in Contact Area

**Physical:**

- ◆ Housing  
Thermoplastic, Black Color
- ◆ Terminal  
Copper Alloy
- ◆ Glue  
Epoxy, Black Color
- ◆ Gasket  
EPDM, Black Color
- ◆ Cover  
Thermoplastic, Black Color
- ◆ Gland  
NBR, Black Color
- ◆ Gland Nut  
Thermoplastic, Black Color
- ◆ O-Ring  
Silicone , Red Color
- ◆ Screw Nut  
Copper Alloy
- ◆ Terminal Plating  
Gold Plating
- ◆ Screw Plating  
Nickel Plating

**Specifications:**

- ◆ Waterproof Rate  
IP68
- ◆ Cable Diameter  
4.0mm to 6.5mm
- ◆ Recommend Cover Torque  
6~7 kgf-cm
- ◆ Recommend Gland Nut Torque  
9~10 kgf-cm

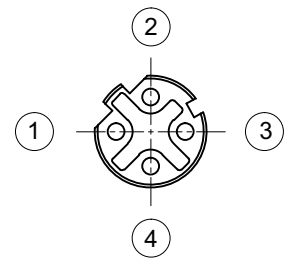

Pin Assignment