
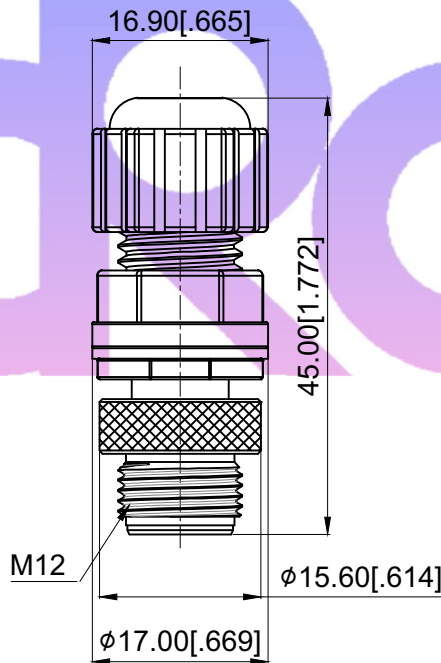


◆ **M12 D-Coding 4A 4P Field Installable Cable End Male Solder**

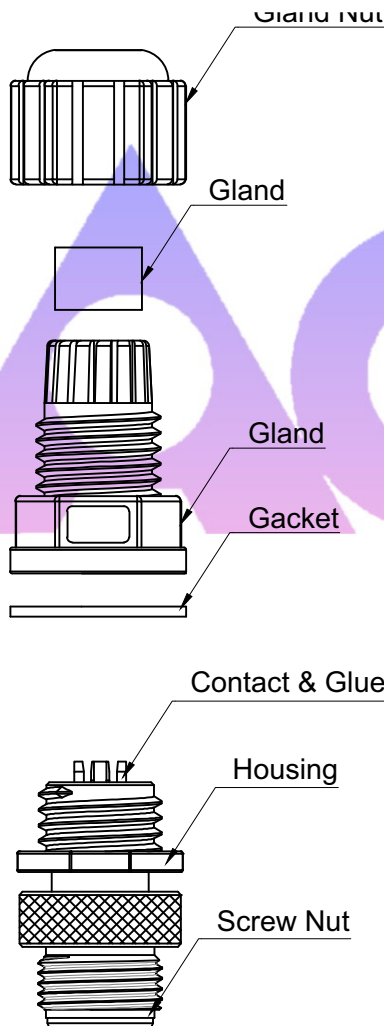

**Ordering Information:**  
**CIR05 - A4 - 4E3 \* 000**

**1**


1. Plating Options  
 0: Gold Flash in Contact Area  
 2: 15u" Gold in Contact Area  
 3: 30u" Gold in Contact Area  
 4: 6u" Gold in Contact Area

**Physical:**

- ◆ Housing  
Thermoplastic, Black Color
- ◆ Terminal  
Copper Alloy
- ◆ Glue  
Epoxy, Black Color
- ◆ Gasket  
EPDM, Black Color
- ◆ Cover  
Thermoplastic, Black Color
- ◆ Gland  
NBR, Black Color
- ◆ Gland Nut  
Thermoplastic, Black Color
- ◆ Screw Nut  
Copper Alloy
- ◆ Terminal Plating  
Gold Plating
- ◆ Screw Plating  
Nickel Plating

**Specifications:**

- ◆ Waterproof Rate  
IP68
- ◆ Cable Diameter  
4.0mm to 6.5mm
- ◆ Recommend Cover Torque  
6~7 kgf-cm
- ◆ Recommend Gland Nut Torque  
9~10 kgf-cm



Pin Assignment