


♦ Modular Jack Right Angle Dip Type

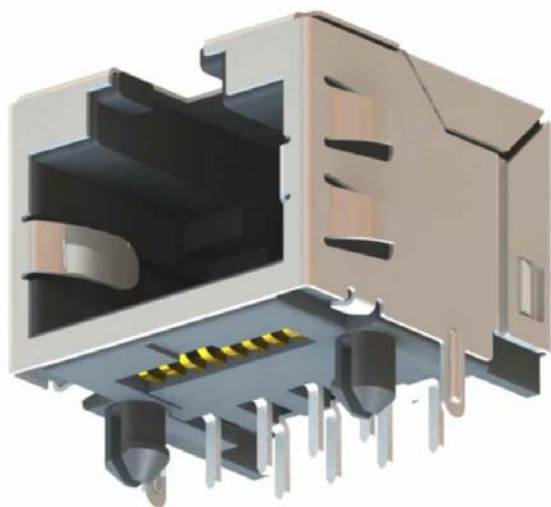

Ordering Information:

GDR15 - N3 - 080 A 100
1

1. Plating Options

A-50u" Gold In Contact Area

Physical:

- ♦ Plastic Housing
Thermoplastic, UL94V-0 Rated, Black Color
- ♦ Insert
Thermoplastic, UL94V-0 Rated, Black Color
- ♦ Terminal
Copper Alloy
- ♦ Terminal Plating
Gold Plating on Contact Area
Tin Plating on Solder Tails
Nickel Underplating Overall
- ♦ Shell
Copper Alloy
- ♦ Shell Plating
Nickel Plating Overall

Mechanical Specifications:

- ♦ Mate Force
22N Max.
- ♦ Durability
200 Cycles
- ♦ Operating Temperature Rating
-25°C to +80°C

Electrical Specifications:

- ♦ Rated Voltage
125V RMS AC
- ♦ Rated Current
1A Max.
- ♦ Contact Resistance
50 Milliohms Max. Initial
- ♦ Dielectric Withstanding Voltage
1A Volts per Second Max.
- ♦ Insulation Resistance
1000 Megohms Min.

