


◆ **S-ATA Receptacle A-Free Bottom Mount Type**

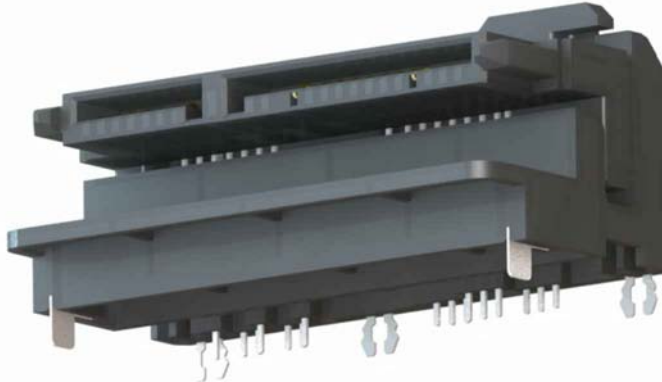

Ordering Information:

SAT29 - N3 - 1 6 0 7 3 2 0
1

- 1.Plating Options
7:15u" Gold in Contact Area

Physical:

- ◆ Housing & Cap
Thermoplastic High Temp,UL 94V-0
Rated,Black Color
- ◆ Terminal
Copper Alloy
- ◆ Hook
Stainless Steel
- ◆ Retainer
Stainless Steel
- ◆ Terminal Plating
Gold Plating on Contact Area
Tin Plating on Solder Tails
Nickel Underplating Overall
- ◆ Hook Plating
Tin plating Overall
Nickel Underplating Overall
- ◆ Retainer Plating
Tin plating Overall
Nickel Underplating Overall

Mechanical Specifications:

- ◆ Durability
200 Cycles per Hour
- ◆ Operating Temperature Rating
-40°C to +85°C

Electrical Specifications:

- ◆ Rated Voltage
15V DC
- ◆ Rated Current
1.5A Max.
- ◆ Contact Resistance
30 Milliohms Max. Initial
- ◆ Dielectric Withstanding Voltage
500V AC Min for 1 Minute
- ◆ Insulation Resistance
1000 Megohms Min.

