


◆ 6 Pins 2.54mm Pitch Micro SIM Conn. Push/Pull Type

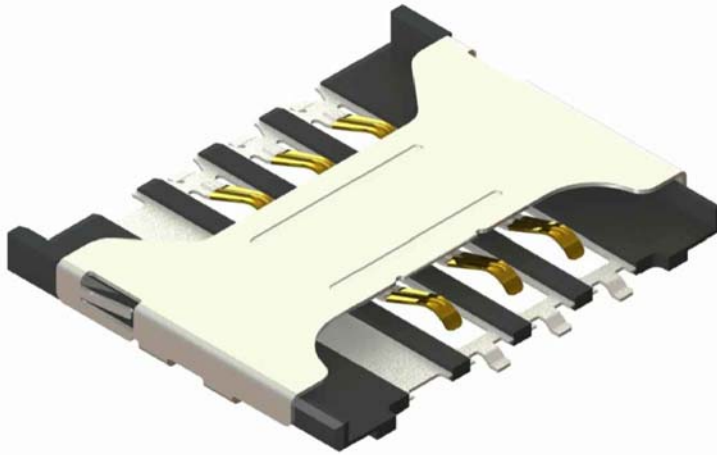

Ordering Information:

SCM29 - N3 - 0 6 0 7 1 0 0
1

- 1. Plating Options
- 0-Gold Flash In Contact Area
- 7-15u" Gold In Contact Area

Physical:

- ◆ Housing: LCP, 94V-0 Rated, Black Color
- ◆ Terminal: Copper Alloy
- ◆ Shell: Stainless Steel
- ◆ Terminal Plating: Gold Plating on Contact Area, Gold Flash Plating on Solder Tails, Nickel Underplating Overall
- ◆ Shell Plating: Gold Flash Plating on Solder Tails, Nickel Underplating Overall

Mechanical Specifications:

- ◆ Normal Force: 0.1N/Pin Min.
- ◆ Durability: 5000 Cycles
- ◆ Operating Temperature Range: -40°C to +85°C

Electrical Specifications:

- ◆ Rated Voltage: 50V DC Max.
- ◆ Rated Current: 0.2A Max.
- ◆ Contact Resistance: 80 Milliohms Max. Initial
- ◆ Dielectric Withstanding Voltage: 500V AC Min for 1 Minute
- ◆ Insulation Resistance: 1000 Megohms Min.

