


AcRON PRODUCT SPECIFICATION

PRODUCT NAME: 3 pin 2.50mm pitch battery connector

PRODUCT NO: BTM14 Series

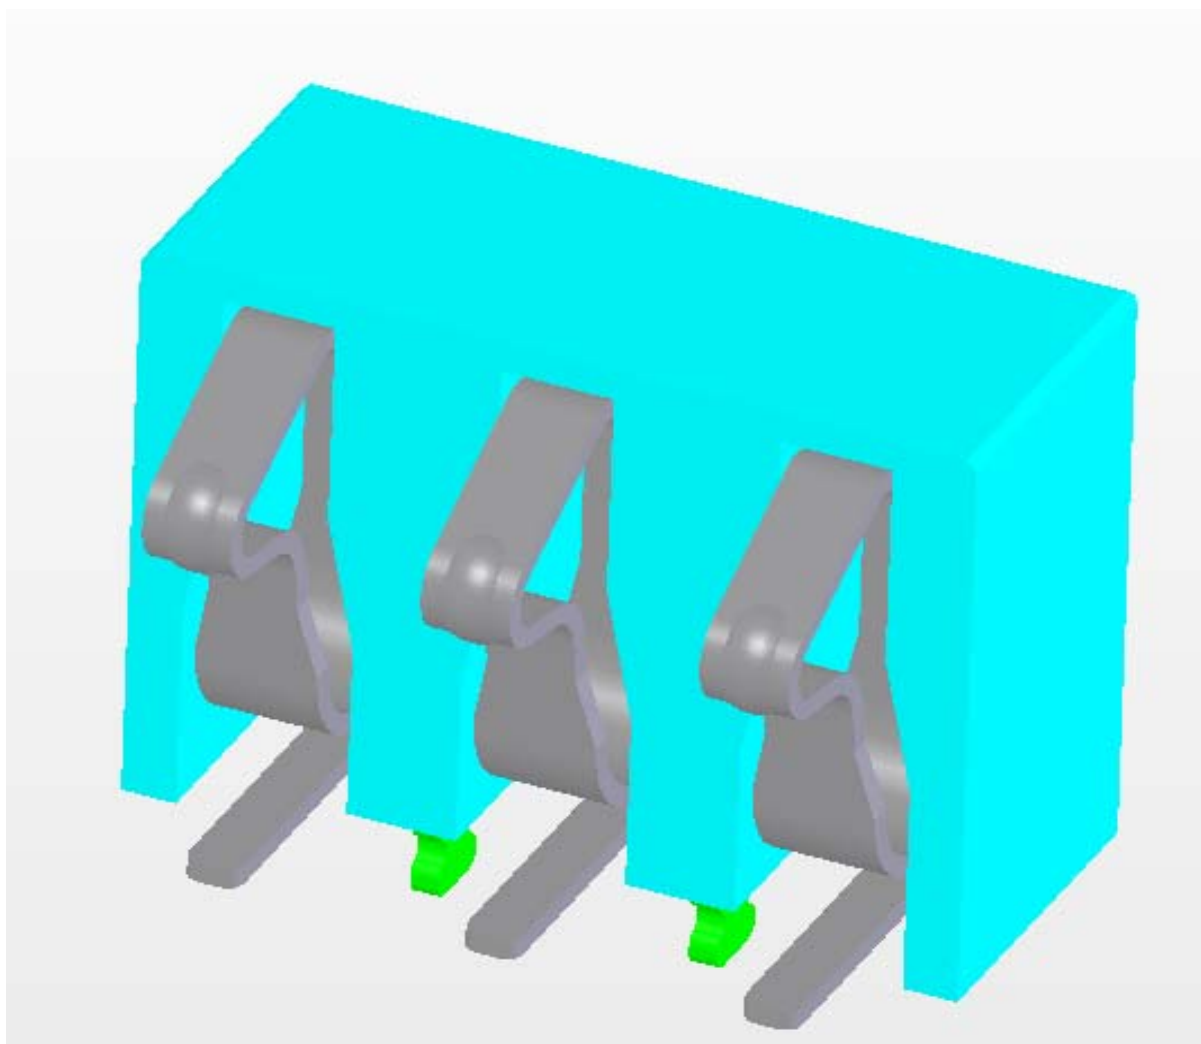

育鼎精密工業股份有限公司
ACRON PRECISION INDUSTRIAL CO., LTD

桃園縣八德市廣德里新興路 55 號

No.55, SinSing Road., Bade City, Taoyuan County 334, Taiwan(R.O.C)

TEL : 886-3-3629889 FAX : 886-3-3664917

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: DATE: 2009/03/02	3 PIN 2.50mm PITCH BATTERY CONNECTOR	1 of 8
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-BC-0021	ANNE.YANG	KIMI.HSU	TONY.CHANG



PRODUCT SPECIFICATION

1.0 SCOPE

This Product Specification covers the performance requirements for 3pin 2.50mm pitch battery connector series. .

2.0 PRODUCT DESCRIPTION

2.1 PRODUCT NAME AND SERIES NUMBER(S)

3 pin 2.50mm pitch battery connector **BTM14** series

2.2 DIMENSIONS, MATERIALS, PLATINGS AND MARKINGS

See appropriate sales drawings for details on dimensions ,materials , plating and markings.

2.3 SAFETY AGENCY APPROVALS

See appropriate sales drawings

3.0 APPLICABLE DOCUMENTS AND SPECIFICATIONS

Please refer to the Sales Drawings , and other sections of this Specification for specific references to applicable documents and specifications. In cases where the Product Specification differs from the Sales Drawings, the Sales Drawing will take precedence

EIA-364 TEST METHODS FOR ELECTRICAL CONNECTORS

4.0 RATINGS

4.1 VOLTAGE

15 Volts DC

4.2 CURRENT

2.0 A Max.

4.3 TEMPERATURE

Operating Temperature Range: - 40°C to + 85°C

Storage Temperature Range: - 40°C to + 85°C

REVISION: B	ECR/ECN INFORMATION: EC No: DATE: 2009/03/02	TITLE: 3 PIN 2.50mm PITCH BATTERY CONNECTOR	SHEET No. 2 of 8
DOCUMENT NUMBER: PS-BC-0021	CREATED / REVISED BY: ANNE.YANG	CHECKED BY: KIMI.HSU	APPROVED BY: TONY.CHANG



PRODUCT SPECIFICATION

5.0 PERFORMANCE

Item	Test Items	Requirement	Procedures
1	Examination of Product	Meets requirements of product drawing. No physical damage.	Specimens shall be investigated by 10x (or higher) microscope.

Electrical Requirements

2	Contact Resistance (LLCR)	30 milliohms Max(Initial)	Subject mated contacts assembled in housing to 20mV maximum open circuit at 100mA maximum. EIA 364-23;
3	Insulation Resistance	1000 Mega Ohm Min.	After 500 VDC for 1 minute, measure the insulation resistance between the adjacent contacts of mated and unmated connector assemblies. EIA 364-21
4	Dielectric Withstanding Voltage	No breakdown; current leakage < 5mA	Apply a voltage 500 V DC for 1 minute between adjacent terminals and between terminals to ground. EIA 364-20
5	Current Rating	Temperature rise: 30°C Max.	Apply the rated current to connector, EIA 364-70

Mechanical Requirements

6	Durability	Δ R: 20 milliohms Max (change from initial)	Operation Speed: 500 cycles/hr. Durability Cycles: 10000 Cycles (Compress pin until Maximum displacement) EIA 364-09.										
7-1	Vibration (Random, Simulate Operating State)	Δ R: 20 milliohms Max (change from initial) & No electrical discontinuity greater than 1 μ sec.	Subject mated connectors to 10-200-500 Hz traversed in 1minutes at 1.52mm amplitude for 0.5 Hour each of 3 mutually perpendicular planes.1.67Grms EIA 364-28; Test condition I										
7-2	Vibration (Random, Simulate Non- Operating State)	Δ R: 20 milliohms Max (change from initial) & No electrical discontinuity greater than 1 μ sec.	Test subject mated connectors by below requirement. Frequency traversed in 1minutes at 1.52mm amplitude 10 minutes each of 3 mutually perpendicular planes. 6.06Grms <table><tr><td>Frequency (Hz)</td><td>A.S.D (G^2/Hz)</td></tr><tr><td>20</td><td>0.0098</td></tr><tr><td>80</td><td>0.04</td></tr><tr><td>350</td><td>0.04</td></tr><tr><td>2000</td><td>0.0069</td></tr></table> EIA 364-28; Test condition I	Frequency (Hz)	A.S.D (G^2/Hz)	20	0.0098	80	0.04	350	0.04	2000	0.0069
Frequency (Hz)	A.S.D (G^2/Hz)												
20	0.0098												
80	0.04												
350	0.04												
2000	0.0069												

REVISION: B	ECR/ECN INFORMATION: EC No: DATE: 2009/03/02	TITLE: 3 PIN 2.50mm PITCH BATTERY CONNECTOR	SHEET No. 3 of 8
DOCUMENT NUMBER: PS-BC-0021	CREATED / REVISED BY: ANNE.YANG	CHECKED BY: KIMI.HSU	APPROVED BY: TONY.CHANG



PRODUCT SPECIFICATION

7-3	Vibration (Operating Sine State)	△R: 20 milliohms Max (change from initial) & No electrical discontinuity greater than 1μsec.	Test subject mated connectors by below requirement. Sweep rate:0.5 octave/min, 3axes,3 sweeps/per axis. <table><tr><td>Frequency (Hz)</td><td>Amplitude</td></tr><tr><td>5-9</td><td>6-6 mm(P-P)</td></tr><tr><td>9-200</td><td>1.0 G</td></tr><tr><td>200-500</td><td>1.5 G</td></tr></table> EIA 364-28;	Frequency (Hz)	Amplitude	5-9	6-6 mm(P-P)	9-200	1.0 G	200-500	1.5 G
Frequency (Hz)	Amplitude										
5-9	6-6 mm(P-P)										
9-200	1.0 G										
200-500	1.5 G										
8-1	Mechanical Shock (Simulate Operating State)	△R: 20 milliohms Max (change from initial) & No electrical discontinuity greater than 1μsec.	Accelerate Velocity: 490m/ s ² (50G) Waveform: 11ms Half-sine shock Velocity Change: 3.4m/s No. of Drops: 3 drops each to normal and reversed directions of X,Y and Z axes, totally 18 drops, passing 1mA current during the test. EIA 364-27;Test Condition C								
8-2	Mechanical Shock (Simulate Non- Operating State)	△R: 20 milliohms Max (change from initial) & No electrical discontinuity greater than 1μsec.	Accelerate Velocity: 490m/ s ² (500G) Waveform: 2ms Half-sine shock Velocity Change: 3.4m/s No. of Drops: 3 drops each to normal and reversed directions of X,Y and Z axes, totally 18 drops, passing 1mA current during the test. EIA 364-27;Test Condition C								
9	Normal Force	1.5N/pin Min.	Apply a perpendicular force at 0.70mm from housing.								
10	Terminal Retention Force (in Housing)	300 gf/Pin Min.	Axial pullout force on the terminal and nail in the housing at a rate of 25 mm per minute. EIA 364-29								
11	Post Retention Force (in Housing)	500 gf/Pin Min.	Axial pullout force on the terminal and nail in the housing at a rate of 25 mm per minute. EIA 364-29								

Environment Requirements

12	Thermal Shock (Simulate Non- Operating State)	R: 20 milliohms Max. (change from initial) & Appearance: no damage	Place free situation samples in chamber with 10 cycles, and one duration is - 40°C/(1.5h)~ 85°C/(1.5h). EIA-364-32
----	---	--	---

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: DATE: 2009/03/02	3 PIN 2.50mm PITCH BATTERY CONNECTOR	4 of 8
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-BC-0021	ANNE.YANG	KIMI.HSU	TONY.CHANG



PRODUCT SPECIFICATION

12-1	Static Humidity (Simulate Operating State)	R: 20 milliohms Max. (change from initial) & Appearance: no damage	Test mated connector in chamber and expose to a temperature of $60 \pm 2^{\circ}\text{C}$ with a relative humidity of 95% for 240 hours. Note: Remove surface moisture and air dry for 1 hour prior to measurements. EIA 364- 31
12-2	Static Humidity (Simulate Non- Operating State)	R: 20 milliohms Max. (change from initial) & Appearance: no damage	Place free situation samples in chamber and expose to a temperature of $70 \pm 2^{\circ}\text{C}$ with a relative humidity of 95% for 240 hours. Note: Remove surface moisture and air dry for 1 hour prior to measurements. EIA 364- 31
13	Solder ability	Solder coverage: 95% MINIMUM	Dip solder tails into the molten solder(held at $245 \pm 5^{\circ}\text{C}$ for 3 ± 0.5 sec. EIA 364-52
14	Solder Heat Resistance	Visual: No Damage to insulator material	Place connector o applicable P.C.B footprint and float on solder bath at $260 \pm 5^{\circ}\text{C}$ for 10 ± 2 seconds. EIA 364-56; Refer to Fig.1
15	Salt Spray	R: 20 milliohms Max. (change from initial) & Appearance: no damage	Duration: 48 hours exposure; Atmosphere:salt spray from a 5% solution. Temperature: $35 + 1/-2^{\circ}\text{C}$ EIA 364-26
16-1	Heat Temperature Life (Simulate Operating State)	R: 20 milliohms Max. (change from initial) & Appearance: no damage	Simulate mated situation samples at 70°C for 240 hours. EIA 364-17
16-2	Heat Temperature Life (Simulate non- operating State)	R: 20 milliohms Max. (change from initial) & Appearance: no damage	Treat samples with 85°C for 240 hours EIA 364-17
17-1	Cold Temperature Life (Simulate Operating State)	R: 20 milliohms Max. (change from initial) & Appearance: no damage	Simulate mated situation samples at -20°C for 240 hours EIA 364-17
17-2	Cold Temperature Life (Simulate non- operating State)	R: 20 milliohms Max. (change from initial) & Appearance: no damage	Treat samples with -40°C for 240 hours EIA 364-17

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: DATE: 2009/03/02	3 PIN 2.50mm PITCH BATTERY CONNECTOR	5 of 8
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-BC-0021	ANNE.YANG	KIMI.HSU	TONY.CHANG



PRODUCT SPECIFICATION

18	Resistance to Sulfuration	R: 20 milliohms Max. (change from initial)	The connector shall be stored at a sulfuration gas ambience (H_2S 3 ± 1 ppm) temperature of $40\pm 2^\circ C$ and relative humidity of 80%RH for 24h continuously. After test, place room situation for 60 minutes. Refer to SS-00126-4 test standard.
----	----------------------------------	---	--


Customer Application Requirements

19	Fully compression	Appearance: no damage	compress connector to 0mm from housing by hand for 10sec
----	--------------------------	-----------------------	--

6.0 PACKAGING

Parts shall be packaged to protect against damage during handling, transit and storage. See packaging appropriate drawings

7.0 RECOMMENDED REFLOW PROFILE

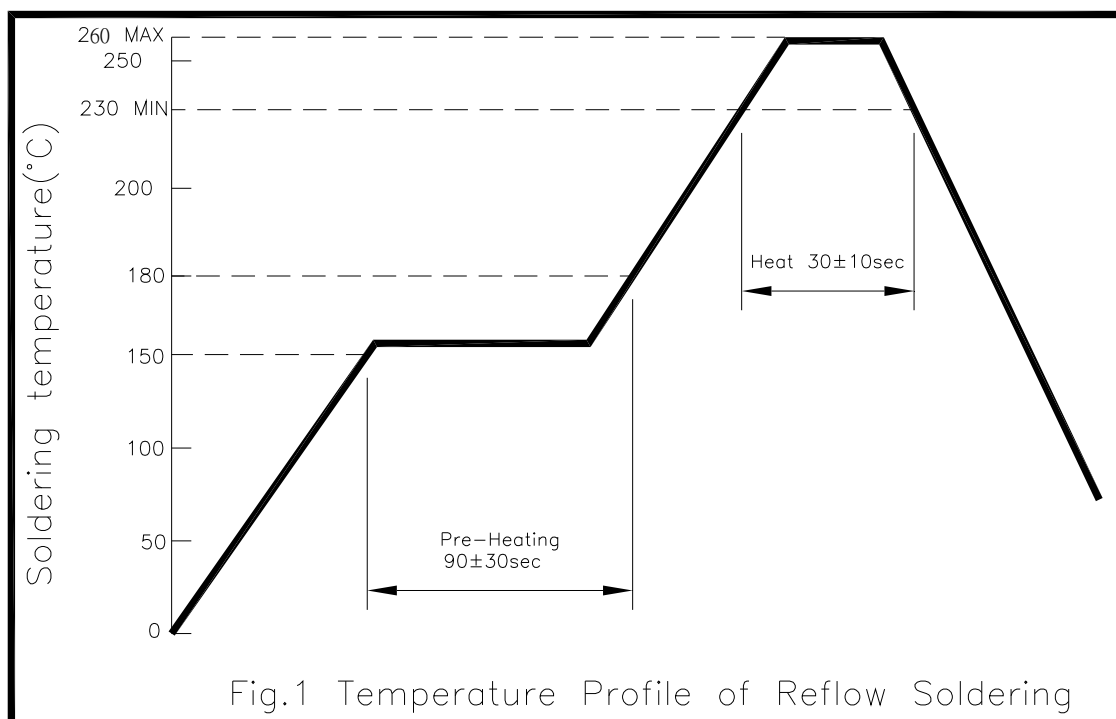

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No: DATE: 2009/03/02	3 PIN 2.50mm PITCH BATTERY CONNECTOR	6 of 8
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-BC-0021	ANNE.YANG	KIMI.HSU	TONY.CHANG



PRODUCT SPECIFICATION

8.0 TEST GROUPINGS

Test Items	Test Group											
	1	2	3	4	5	6	7	8	9	10	11	12
	Test Sequence											
Examination of product	1,8	1,12	1,9	1,8	1,10	1,10	1,10	1,6	1,6	1,6	1,6	
Contact Resistance (LLCR)	2,7	3,11	3,8	3,7	3,9	3,9	3,9	2,5	2,5	2,5	2,5	
Insulation Resistance		4,10	4	4	4,8	4,8	4,8					
Dielectric Withstanding Voltage		5,9	7	6	5,7	5,7	5,7					
Current Rating												✓
Durability		7										
7-1 Vibration (Random, Simulate Non-Operating State)								4				
7-2 Vibration (Random, Simulate Non-Operating State)									4			
7-3 Vibration (Operating Sine State)										4		
8-1 Mechanical Shock (Simulate Operating State)	5										4	
8-2 Mechanical Shock (Simulate Non-Operating State)												
Normal Force	6	6,8										
Terminal Retention Force (in Housing)												✓
Thermal Shock			5									
12-1 Static Humidity (Simulate Operating State)			6									
12-2 Static Humidity (Simulate Non-Operating State)				5								✓
Solder ability												✓

REVISION:	ECR/ECN INFORMATION:	TITLE:	SHEET No.
B	EC No:	3 PIN 2.50mm PITCH BATTERY CONNECTOR	7 of 8
DATE: 2009/03/02			
DOCUMENT NUMBER:	CREATED / REVISED BY:	CHECKED BY:	APPROVED BY:
PS-BC-0021	ANNE.YANG	KIMI.HSU	TONY.CHANG

PRODUCT SPECIFICATION

Solder Heat Resistance	3	2	2	2	2	2	2	3	3	3	3	
Salt Spray					6							
16-1 Heat Temperature Life (Simulate Operating State)						6						
16-2 Heat Temperature Life (Simulate non-operating State)												✓
17-1 Cold Temperature Life (Simulate Operating State)							6					
17-2 Cold Temperature Life (Simulate non-operating State)												
Resistance to Sulfuration												✓
Fully compression	4											
Sample Size	4	4	4	4	4	4	4	4	4	4	4	5

REVISION: B	ECR/ECN INFORMATION: EC No: DATE: 2009/03/02	TITLE: 3 PIN 2.50mm PITCH BATTERY CONNECTOR	SHEET No. 8 of 8
DOCUMENT NUMBER: PS-BC-0021	CREATED / REVISED BY: ANNE.YANG	CHECKED BY: KIMI.HSU	APPROVED BY: TONY.CHANG