


◆ USB B Type Right Angle Connector

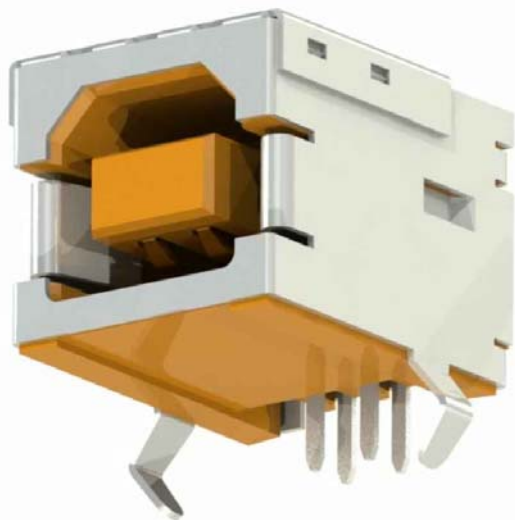

Ordering Information:

HTUSRXR - 241 - OC - 01

Physical:





- ◆ Housing
Thermoplastic High Temp, UL 94V-0 Rated
Color: Pantone 151C
- ◆ Terminal
Copper Alloy
- ◆ Shell
Copper Alloy
- ◆ Terminal Plating
Gold Plating on Contact Area
Tin Plating on Solder Tails
Nickel Underplating Overall
- ◆ Shell Plating
Tin Plating Over on Solder Tails
Nickel Underplating Overall

Mechanical Specifications:

- ◆ Durability
1500 Cycles
- ◆ Operating Temperature Rating
-20°C to +60°C

Electrical Specifications:

- ◆ Rated Voltage
30V DC
- ◆ Rated Current
1.5A DC
- ◆ Contact Resistance
30 Milliohms Max. Initial
- ◆ Dielectric Withstanding Voltage
750V AC Min for 1 Minute
- ◆ Insulation Resistance
1000 Megohms Min.

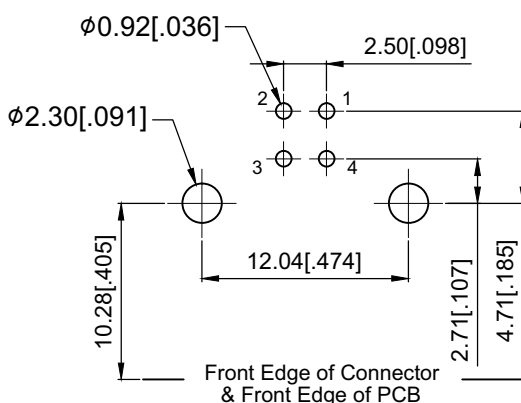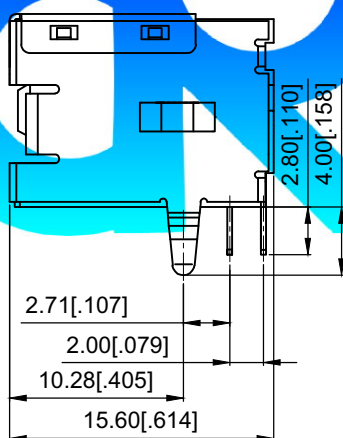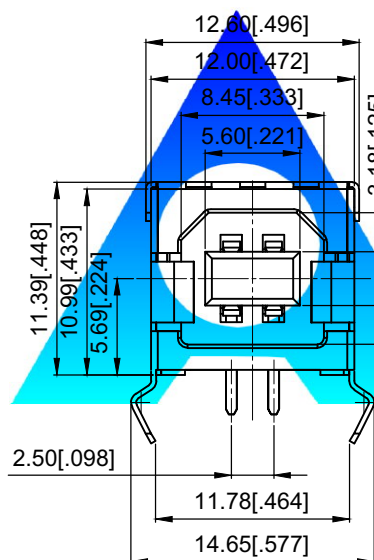

Recommended PCB Layout